

COOLMANT / COOLFLEX

Energy- and cost-efficient systems for district cooling



An innovative approach for energy-efficient district cooling

COOLFLEX and COOLMANT



District cooling has a promising future. Utilizing the waste heat given off from numerous potential sources of energy for cooling is a highly energy-efficient approach that also protects the environment. Thanks to the COOLFLEX and COOLMANT district cooling system from Brugg, the vision of energy-saving, low-emission cooling is now a reality.

How waste heat is used for cooling

District heating – a sustainable concept – is becoming more widespread as time goes on. Utilizing waste heat to supply heating and hot water in buildings saves energy and plays a major part in reducing emissions of harmful substances. Waste heat can also be converted for cooling purposes with the help of absorption machines. This opens up the way to efficient district cooling.

District cooling systems can be supplied with energy from a variety of sources, via insulated pipes that carry cooled water to the consumers.

Increased energy efficiency – reduced environmental impact

District cooling offers many different benefits compared to conventional cooling methods. First and foremost, it is energy-efficient: power consumption is dramatically reduced, which also means that less primary energy is consumed.

Potential sources of energy include waste incineration plants, industrial facilities, combined heat and power plants or natural sources such as water in rivers, lakes or the sea. Another option is to make use of cutting-edge technologies in areas such as solar and geothermal energy.

A system that offers excellent insulation performance

Flexible COOLFLEX and rigid COOLMANT composite pipes from Brugg provide a comprehensive system to implement totally corrosion-free district cooling networks. These future-oriented, high-tech products are the fruit of Brugg's decades of experience with pre-insulated systems. Their quality is evident from their superb insulation performance: within a small cross section, they achieve excellent insulation values thanks to their minimal thermal conductivity. Low losses significantly reduce energy consumption, so district cooling with COOLFLEX and COOLMANT is an investment with a long-term payback.

Tried and tested system technology in a future-oriented application

COOLFLEX and COOLMANT



Compact and reliable

The "core" of our high-tech COOLFLEX and COOLMANT pipes is an inner pipe made of certified polyethylene (HDPE). Together with the highly effective fine-pore polyurethane foam insulation, this forms a compact composite system with outstanding long-term thermal performance. The outer casing reliably protects the district cooling pipe against mechanical influences. The pipes can also be installed at low temperatures of about 0°C.

Reliable operation – in the long term

The compact COOLFLEX and COOLMANT pipe structure prevents the longitudinal flow of water in the event that the pipe is damaged by external influences. These underground systems are self-compensating: thermally-induced length changes in the system are absorbed within the pipe structure. COOLFLEX and COOLMANT have good resistance to chemicals and are ideal for the use with ethylene glycolene or other additives.

Easy-to-install system concept

COOLFLEX and COOLMANT composite pipes are quick and straightforward to install. Thanks to their small outer diameters and long delivery lengths, the trench dimensions can be reduced – so the construction work progresses more rapidly. The flexible COOLFLEX system, designed for smaller district cooling networks and house connections, is supplied as a continuous product in coils of up to 807m in one length, depending on the dimensions required. The coils are easy to unroll. Since COOLFLEX allows short curve radii, obstacles can be elegantly bypassed without angle joints. With generous delivery lengths it can often be possible to avoid any underground joints in smaller district cooling projects! Remember: fewer connections mean less installation outlay and more reliable system operation.

For the sake of our environment - intelligent cooling

COOLFLEX and COOLMANT




The flexible COOLFLEX system for smaller district cooling networks (house connections, residential estates, hotels and resorts, etc.)



The rigid COOLMANT system for wide-area district cooling networks (urban buildings and office complexes, hospitals, shopping centers, etc.)



Energy sources for district cooling

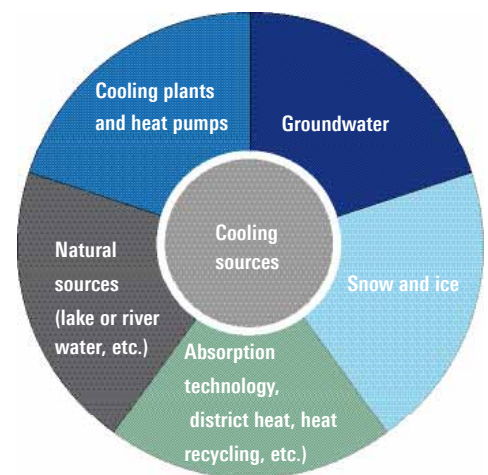

Key benefits of district cooling:

- Unlimited cooling comfort for users thanks to demand-led cooling
- More cost-effective cooling thanks to lower capital outlay and reduced operating and maintenance costs
- Less space required for compact transfer stations
- Low-noise or silent operation, compared to conventional air conditioning technology
- CO₂ emissions reduced by highly efficient central district cooling

Tried-and-tested system technology in a future-oriented application

COOLFLEX and COOLMANT



Endless flexibility

The excellent flexibility of COOLFLEX and COOLMANT systems allows planners to select the optimum routing and combination of district cooling pipes in response to the requirements imposed by the terrain. The patented corrugated outer casing of COOLFLEX pipes means that they can easily be adapted to virtually all pipe routing conditions. More efficiency thanks to: shorter distances, less trenchwork, less material, lower costs.

Reliable joints that are quick to assemble

An extensive range of 100%-tight fittings is available for safe and reliable joints between COOLFLEX and COOLMANT composite pipes, or between these pipes and the technical installations in the overall system. Our extensive range includes electro-welding joints, pipe couplings and screwed fittings.

Clip-shell technology: reliable and easy to fit

Supplementary insulation for the COOLFLEX pipe system is provided by our patented clip shells, which provide perfect protection for pipe junctions. The shells are all-plastic and can be fitted quickly and reliably without any tools. To restore the insulation, the shells are filled on site with pentane-blown insulating polyurethane foam.

Our range: a wide selection – with high availability

The components of our COOLFLEX and COOLMANT system can be supplied ex stock at short notice.

Our wide and varied range of accessories provides the perfect solution for every project. Specially manufactured items are also available with short delivery periods.

The excellent availability of COOLFLEX and COOLMANT products gives you more flexibility with planning and ensures minimum disruption to works on site.

COOLFLEX



COOLFLEX Ø 20–125 mm / SDR 11 (16 bar)

| Type | DN | Inches " | Minimum bending radius m | Weight kg/m | Coil length m |
|---------|-----|-------------|--------------------------------|----------------|------------------|
| 25/ 76 | 20 | ¾" | 0.7 | 0.90 | 520/807 |
| 32/ 76 | 25 | 1" | 0.7 | 1.00 | 520/807 |
| 40/ 91 | 32 | 1¼" | 0.8 | 1.39 | 377/590 |
| 50/ 91 | 40 | 1½" | 0.8 | 1.94 | 271/429 |
| 63/126 | 50 | 2" | 1.0 | 2.60 | 192/305 |
| 75/126 | 65 | 2½" | 1.0 | 2.75 | 143/229 |
| 90/162 | 80 | 3" | 1.2 | 4.56 | 92/149 |
| 110/162 | 100 | 4" | 1.2 | 5.69 | 92/149 |
| 125/182 | 125 | 5" | 1.4 | 6.37 | 52/ 86 |

COOLMANT



COOLMANT Ø 125–315 mm / SDR 11 (16 bar)

| Type | Inches " | PE inner pipe d x s mm | Outer pipe D x s1 mm | Volume Inner pipe l/m | Weight kg/m | Standard length m |
|---------|-------------|------------------------------|----------------------------|-----------------------------|----------------|-------------------------|
| 125/225 | 5" | 125 x 11.4 | 225 x 3.5 | 8.203 | 7.61 | 5/10 |
| 140/225 | - | 140 x 12.7 | 225 x 3.5 | 10.315 | 8.38 | 5/10 |
| 160/250 | 6" | 160 x 14.6 | 250 x 3.9 | 13.437 | 10.67 | 5/10 |
| 180/280 | 7" | 180 x 16.4 | 280 x 4.4 | 17.018 | 13.45 | 5/10 |
| 200/315 | 8" | 200 x 18.2 | 315 x 4.9 | 21.021 | 16.77 | 5/10 |
| 225/315 | 9" | 225 x 20.5 | 315 x 4.9 | 26.590 | 18.91 | 5/10 |
| 250/355 | 10" | 250 x 22.7 | 355 x 5.6 | 32.878 | 23.68 | 5/10 |
| 280/400 | 11" | 280 x 25.4 | 400 x 6.3 | 41.259 | 29.85 | 5/10 |
| 315/450 | 12" | 315 x 28.6 | 450 x 7.0 | 52.198 | 37.69 | 5/10 |

COOLMANT Ø 125–315 mm / SDR 17 (10 bar)

| Type | Inches " | PE inner pipe d x s mm | Outer pipe D x s1 mm | Volume Inner pipe l/m | Weight kg/m | Standard length m |
|---------|-------------|------------------------------|----------------------------|-----------------------------|----------------|-------------------------|
| 125/225 | 5" | 125 x 7.4 | 225 x 3.5 | 9.230 | 6.63 | 5/10 |
| 140/225 | - | 140 x 8.3 | 225 x 3.5 | 11.960 | 6.82 | 5/10 |
| 160/250 | 6" | 160 x 9.5 | 250 x 3.9 | 15.610 | 8.60 | 5/10 |
| 180/280 | 7" | 180 x 10.7 | 280 x 4.4 | 19.760 | 10.85 | 5/10 |
| 200/315 | 8" | 200 x 11.9 | 315 x 4.9 | 24.380 | 13.58 | 5/10 |
| 225/315 | 9" | 225 x 13.4 | 315 x 4.9 | 30.850 | 14.86 | 5/10 |
| 250/355 | 10" | 250 x 14.8 | 355 x 5.6 | 38.150 | 18.67 | 5/10 |
| 280/400 | 11" | 280 x 16.6 | 400 x 6.3 | 47.840 | 23.60 | 5/10 |
| 315/450 | 12" | 315 x 18.7 | 450 x 7.0 | 60.520 | 29.78 | 5/10 |

Operating parameters

Operating temperature: max. - 20°C to + 40°C*

Operating pressure: 16 bar

* Hot water applications with restricted lifetime and operating pressure / as per DIN 8074

Pipe system for the future

Heating systems – Industry – Petrol stations – System packages



Your partner for pipe systems

We are the people you should talk to when you need to find efficient solutions for transporting liquid materials. With our project engineers, development department, in-house production unit and our professional team of fitters, we have the know-how and the resources to look after your projects competently and reliably. For all types of heating systems, petrol station construction, industrial plant construction and system packages.

International network

Our global partnership network can be reached on site at any time. More than 34 partners in 20 different countries will look after you wherever you are.

Customer-specific solutions

Brugg is the full service provider in the field of single-wall, double-wall and insulated pipe systems. This know-how allows us to manufacture project-specific customised items.

Give us a call!

Our engineers will be pleased to advise you and find a made-to-measure solution.

Brugg Rohrsystem AG

Industriestrasse 39
CH-5314 Kleindöttingen
Telephone +41 (0)56 268 78 78
Fax +41 (0)56 268 78 79
pipesystems@brugg.com
www.pipesystems.com

BRUGG Rohrsysteme GmbH

Adolf-Oesterheld-Straße 31
D-31515 Wunstorf
Telephone +49 (0)50 31 170-0
Fax +49 (0)50 31 170-170
info@brugg.de
www.brugg.de

A company of the BRUGG Group